



## Full Height Turnstile



### WTD-FHT 2L (EM)

### WTD-FHT1L (EM)

#### FEATURES

Designed for seizure operation with aesthetics in mind

Corrosion protected S/S frame

Minimal exposed hardware

Heavy gauge materials meeting ASTM standard

Consist of rotar assembly and shield

Assembly, barrier section, mechanism housing and ceiling plate

Dual lane operation for independent to and from operations

Integration support with any RFID/Biometric Reader through NO input

IP44 Ingress Protection rating



LED Direction Indicators	IP44	100% Duty Cycle	Delay Time	Wired Terminal



GeM  
Government  
eMarketplace

# Full Height Turnstile


## TECHNICAL SPECIFICATIONS

Parameter	Specifications
Protection level	IP44
Humidity	95%
Solenoid	24v DC 100%
Signal Output	12v pulse
Arms	3 spokes@120° angle x 10 rotating arms (standard) 4 spokes@90° angle x 10 rotating arms (optional)
Passage width	<650mm
Frequency	50 or 60 Hz
Electro-magnetic drive	DC
Operating temper range	-25~+70°C
Power Supply	100V-240V AC
Power consumption	30W
Dimension	2100 x 1500 x 2310 mm
Certifications	CE, FCC, ROHS

\*Exact products and specifications shown may vary by geographic region and are subject to change without notice. Weights and measurements are approximate and may vary.

## DIMENSIONS

Unit: mm

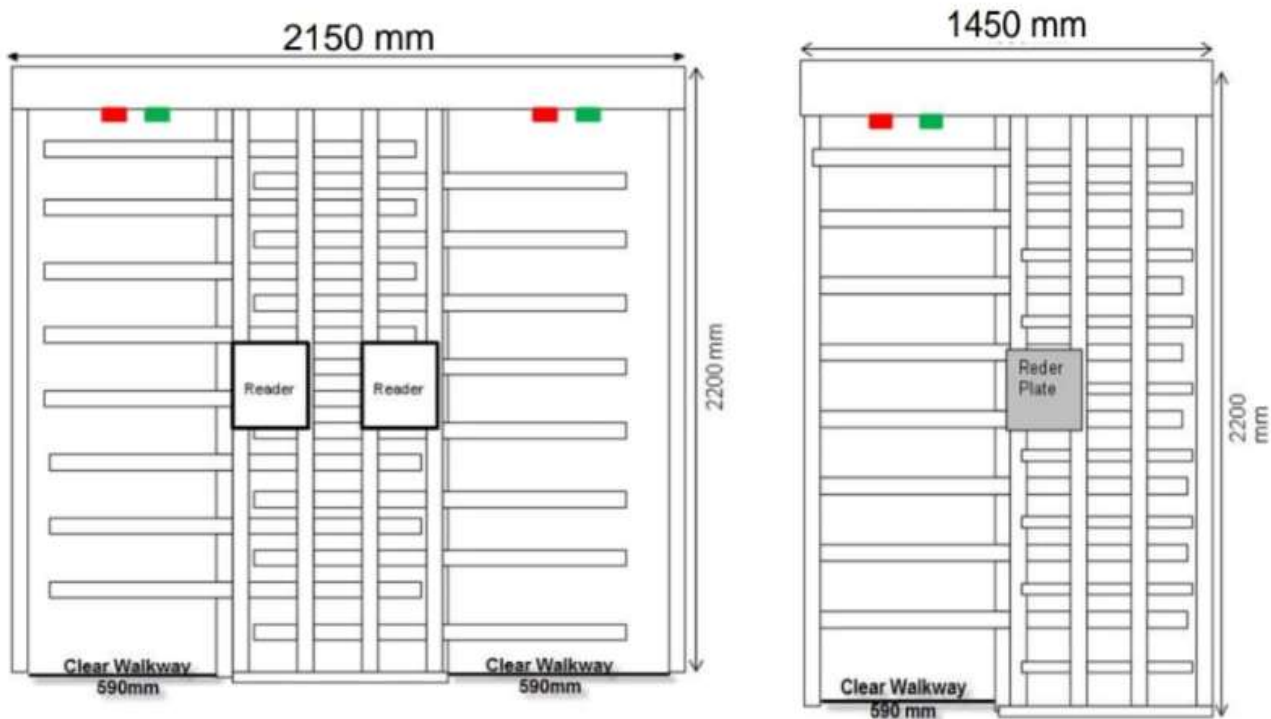

[INFO@WOTDGROUP.COM](mailto:INFO@WOTDGROUP.COM)

[WWW.WOTDIGITALSERVICES.COM](http://WWW.WOTDIGITALSERVICES.COM)

