



WOT DIGITAL SERVICES PRIVATE LIMITED

Address: 16, Street Address 1(A), Maruti Kunj, Bhondsi, Sohna Road, Gurugram, HR 122101

Mob: +91-9518203119 , Mail: info@wotdgroup.com , Url: www.wotdgroup.com

Walk Through Metal Detector



WTD-D2121
12 Zone



WOT DIGITAL SERVICES PRIVATE LIMITED

Address: 16, Street Address 1(A), Maruti Kunj, Bhondsi, Sohna Road, Gurugram, HR 122101

Mob: +91-9518203119 , Mail: info@wotdgroup.com , Url: www.wotdgroup.com

Walk Through Metal Detector

Features and Functions

- High bright LED Indicator on both side Panel
- 0-255 Sensitivity Level.
- 0-255 threshold level setting.
- 0-255 Metal Level Display.
- 4X40 character LCD for Parameters Display.
- Human Barograph Display for pin point Display.
- 6 digits in / Out Counter - 999999
- 4 digit Password Protected Keypad for parameters setting.
- Walk/Stop Indicator to control traffic flow.
- Detects ferrous and non-ferrous material.
- LCD display to judge the volume of carried material through particular zones and to set system parameter Self balancing against any change in ambience and associated metal around.
- Instant recovery on detection.
- Geographical console display to locate metal position.
- Inbuilt IR sensors to avoid false alarms detection
- Specification:
 - Microprocessor based
 - Passage Clearance
 - Weight : 40 Kg (Approx.)
 - Power: 230 VACS, +/- 15 %, 50 Hz.

Advanced function

1. Intelligent partition: Can change detection zones according customers' demands
For example convert 6 zones to 12 zones or 18 zones(optional)
2. Can connect PC terminal that change specification of WTMD anytime, anywhere(optional)
3. We integrate 72 application occasions in the program, so can change all zones Sensitivity when you choose different occasion.
4. Have 4 kinds infrared mode: IR ON/IR OFF/Front group IR ON/Back group IR ON.

Specifications

Vertical dimension	2200x480x880mm
Vertical channel size	2000x700mm
Packing size	2270 X 700 X 230 mm
Net weight of main box/detection door	48KG
Gross weight of main box/detection door	52KG
Detection zones	12 zones
Working voltage	AC90V~240V50/60Hz
Power consumption	20W
Each zone sensitivity	1-400 Level
Security level	100 Level
Working frequency range	1-50bands
Relative Humidity	0 - 95 %



WOT DIGITAL SERVICES PRIVATE LIMITED

Address: 16, Street Address 1(A), Maruti Kunj, Bhondsi, Sohna Road, Gurugram, HR 122101


Mob: +91-9518203119 , Mail: info@wotdgroup.com , Url: www.wotdgroup.com

Walk Through Metal Detector

Working environment temperature

-20°C~65°C

Dimension

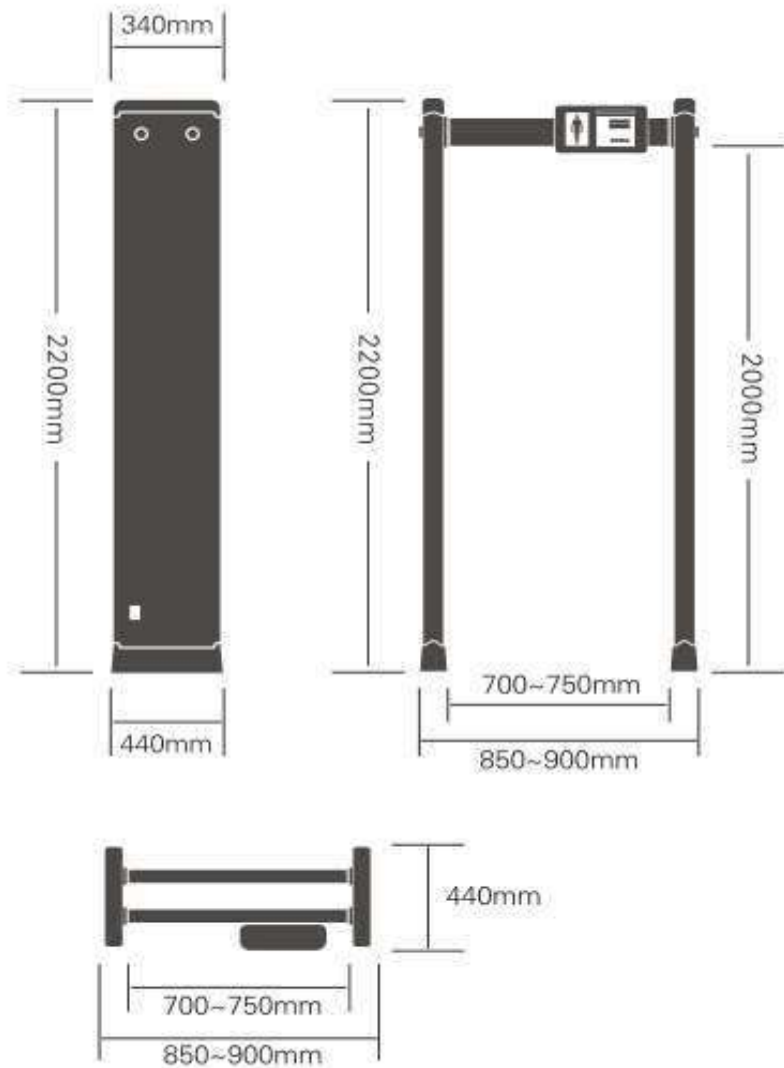

WOT DIGITAL SERVICES PVT.LTD.

www.wotdigitalservices.com

info@wotdgroup.com



DISCLAIMER : Brief specification are mentioned here. Specification may change without prior notice. Customer are advised to check with us before purchase
Actual product may differ slightly to that depicted for ongoing product development